

BUCKET ELEVATORS

The Maxima series bucket elevators have nominal capacities up to 1500 t/h. The belt speed can be set up to 3.2 m/s.

We can supply PEHD, nylon or steel buckets. Removable anti-wearing covering on the head and on the feeding studs (available in PU or anti-wearing steel).


Anti-oil anti-static belt.

Driving wheel with detachable rubber sectors.

Inspection doors on the foot and on the head.

Possibility to add some magnets on the inlet of the elevator.

Anti-clogging sensors, anti-skid, revolution control and temperature control of bearings.

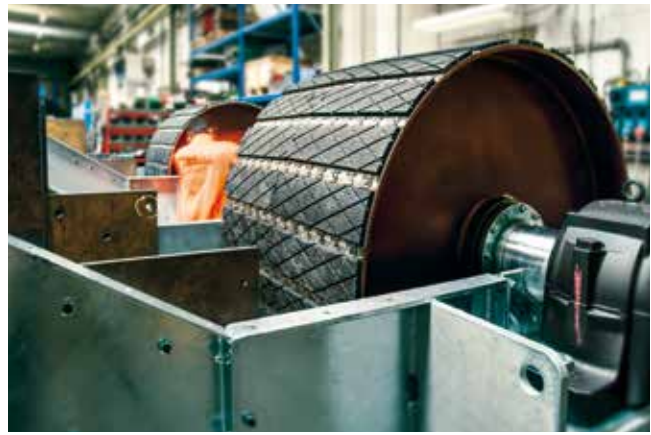

Rubber coating on pulley with detachable sectors



Hardox anti-wearing covering

MAXIMA
HD



Bucket elevator MXE 125.110 with capacity of 1000 t/h



Head structure of MXE 127.70